

## Power Distribution Block

Ordering #: EB-4-04-T

**Versatile Line Connections:** Supports screw terminals and lugs for #1/0 conductors

**Flexible Load Options:** Combine quick-connect tabs, binding screws, or pressure screw connectors

**Extensive Model Range:** Nearly 100 configurations available to suit diverse applications

**Reliable Power Distribution:** Two-pole design ensures stable, high-capacity performance

**UL Flame Rating:** UL 94 V-1 rated for flame retardancy

**Durable Construction:** UL-listed molded phenolic base rated for 150°C

**Optional Features:** Custom terminal combinations and configurations to match specific needs

IN  
STOCK



EB-4-04

### EB-4-04 Specs

Voltage: 300V


Current: 75A

Wire Range: #2-14 AWG

Wire Type: Cu or Al

Temp Rating: 150°C

Tightening Torque: 35-50 in.-lbs.

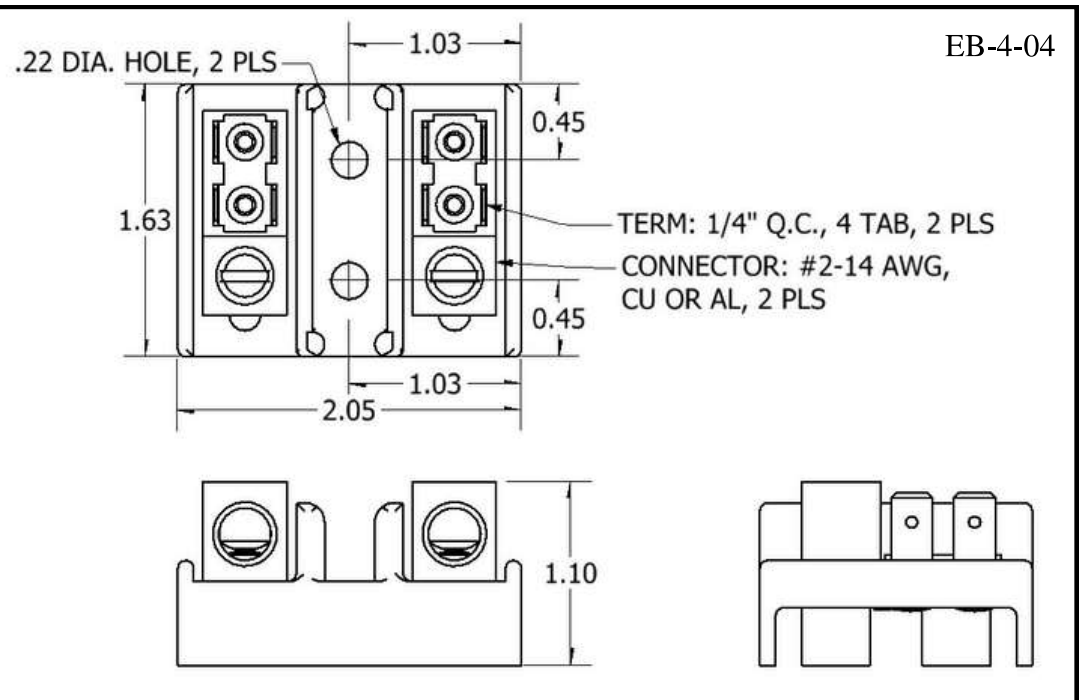

All dimensions are in inches