

## Power Distribution Block

Ordering #: ED-3

**Heavy-Duty Power Junction:** Designed for incoming power to internal factory wiring

**Versatile Configurations:** Available in 2- or 3-pole models for a wide range of applications

**Ideal for Demanding Uses:** Perfect for electric furnaces, duct heaters, heat pumps, commercial cooking equipment, and electric water heaters

**High Electrical Rating:** 600V, supports #2 to #14 AWG copper or aluminum conductors, rated for 150°C continuous duty

**Durable Base Material:** Molded from UL 94 V-1 rated electrical-grade phenolic, rated 150°C

**Enhanced Safety:** Extra heavy sections and recessed mounting fasteners improve strength and protection

**Reliable Construction:** One-piece connectors eliminate mechanical-electrical joints, reducing the risk of hot spots



### ED-3 Specs

Voltage: 300V\*

Current: 75A


Temperature Rating: 150°C

Wire Range (Cu): #2-14 AWG

Wire Range (Al): #2-10 AWG

Tightening Torque: 35-45 in.-lbs.

\*600V is only applicable for industrial use

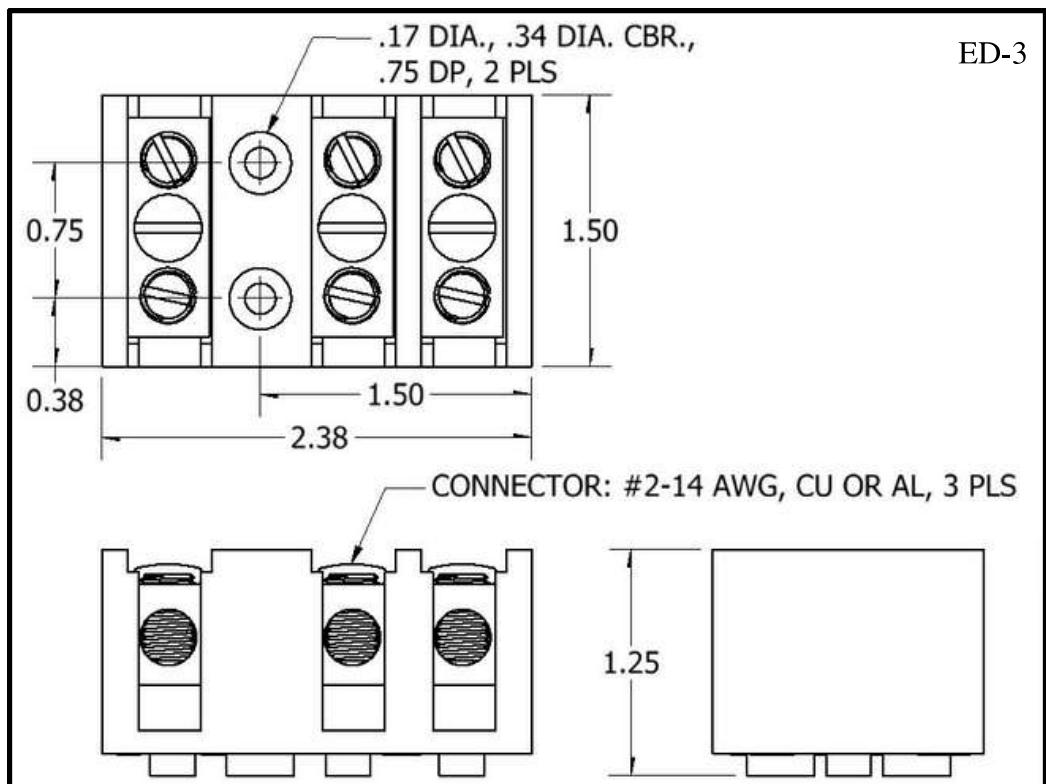

All dimensions are in inches

ED Series