

## General Purpose Terminal Block

Ordering #: ESB2-217-274

**Expanded Capacity:** Designed for applications needing more connections than the ESB1 Series allows

**Space-Efficient Design:** Provides more connections in less space than open terminal blocks

**Highly Configurable:** Offers hundreds of combinations of quick-connect and screw terminals

**Wide Compatibility:** Standard spacing and mounting meet a broad range of wiring requirements

**Cost-Efficient Solution:** Meets 80% of general-purpose junction needs at a lower cost

**Quick Availability:** Stocked components allow near off-the-shelf delivery

**No Tooling Charges:** More economical than custom-fabricated terminal boards

**Flexible Tab Sizes:** Standard .250 x .032 tabs; most configurations also available in .187 x .020

**Durable Construction:** UL-listed molded phenolic base rated for 150°C

**Enhanced Safety:** Electrical spacing exceeds 3/8"; elevated base improves moisture protection

**Optional Features:** Available with terminal identification, color-coded printing, and custom marking for improved traceability




### ESB2-217-274 Specs

Voltage: 300V

Current: 20A

Temperature Rating: 150°C

Tightening Torque: 5in.-lbs.

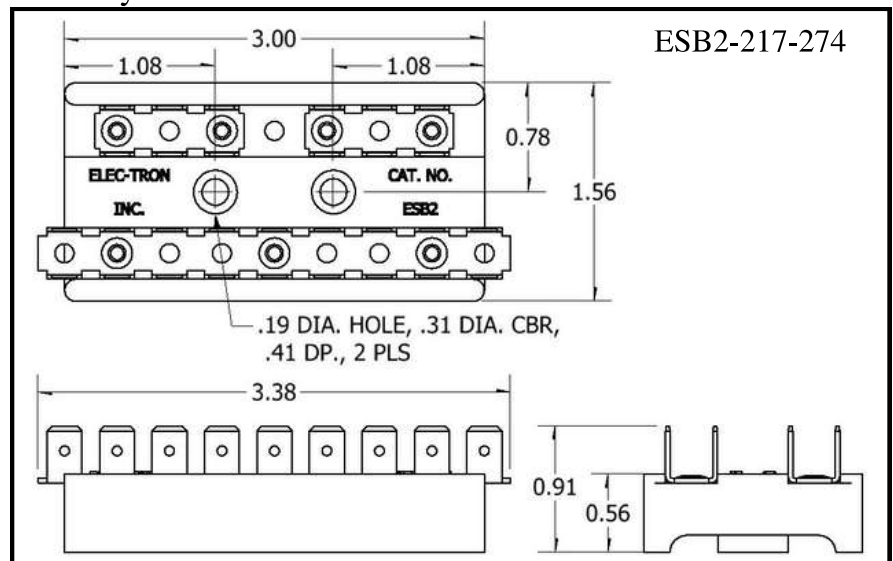

All dimensions are in inches