

Low Voltage Terminal Blocks

Ordering #: ET-2-54X

Customizable Multi-Pole Design: Three standard base sizes combined with 16 terminal styles allow tailored configurations at stock pricing

Highly Versatile: Ideal for internal wiring, field-to-factory connections, or as a thermometer strip in HVAC equipment

Flexible Terminal Options: Supports quick-connect tabs, binding screw terminals, or combinations of both

High Terminal Capacity: Each pole accommodates up to 8 quick-connect tabs, or 6 quick-connects plus one #8 screw terminal

Durable Construction: Molded from high-temp, electrical-grade phenolic rated to 150°C

Superior Electrical Spacing: Engineered molded design provides reliable spacing without requiring extra space

Cost-Effective Alternative: Offers 10–20% savings over conventional barrier strips or fabricated phenolic sheet boards

Clear Identification: Terminal legends can be printed on the front or top for maximum visibility during installation

UL Rated: Listed for 150 volts and 150°C continuous duty

Secure Binding Screws: Standard #8-32 x 3/8" plated steel thread-forming screws resist vibration; plain brass screws optional




ET-2-54X Specs

Voltage: 150V

Current: 20A

Temperature Rating: 150°C

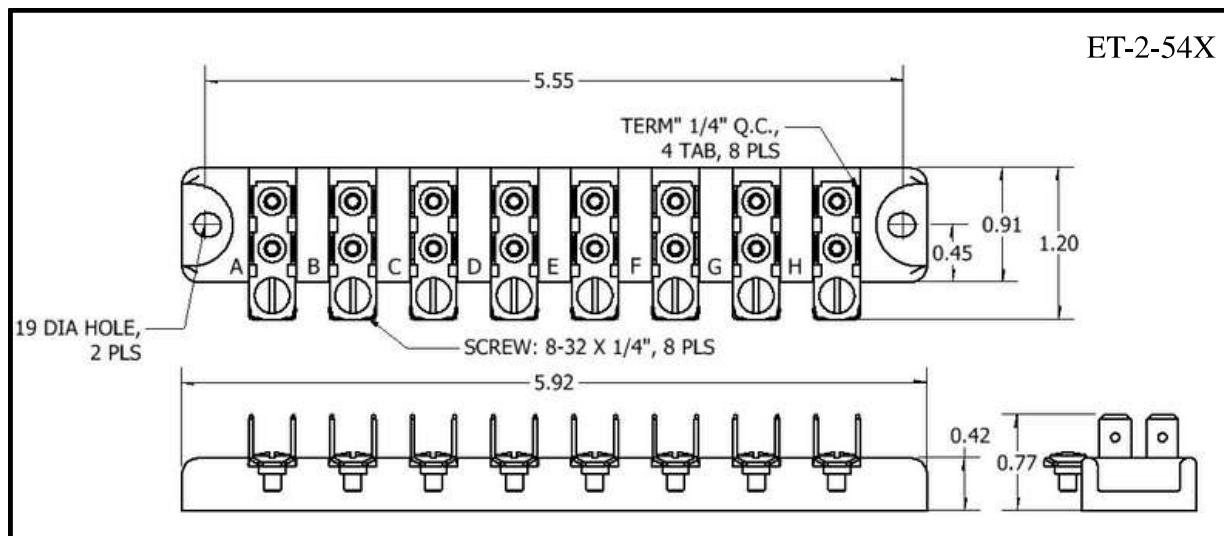

All dimensions are in inches

ET Series